

05.12.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 17 DEC 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02293263.6

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts:  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

**BEST AVAILABLE COPY**



Anmeldung Nr:  
Application no.: 02293263.6  
Demande no:

Anmeldetag:  
Date of filing: 30.12.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Optical device comprising a polymer actuator

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G02B5/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SI SK

**FIELD OF THE INVENTION**

The invention relates to an optical device comprising an optical element which can be deformed so as to modify its optical characteristics.

5           The invention may be used in any apparatus or device in which optical characteristics of an optical element has to be changed, such as the focus of a lens, or the pitch of a diffraction grating.

**BACKGROUND OF THE INVENTION**

10           The Patent of United States published under reference US 2001/0040735A1 describes a variable focus lens. The variable focus lens is constructed by making small changes in the equatorial diameter of an elastically deformable lens. The lens may be deformed by radial tension exerted in a plane generally perpendicular to the optical axis. The radial tension may be exerted by means of mechanical apparatus or by means of rings embedded or attached at the  
15           equator of the lens, whose diameter can be altered by heating or by imposition of electrical or magnetic field.

            The technique described in the prior art document not only implies the use of complicated and numerous actuators for changing the focus of the lens, but is also difficult to  
20           implement in small devices or apparatus.

**OBJECT AND SUMMARY OF THE INVENTION**

            It is an object of the invention to propose an improved optical device for deforming an optical element.

25

            To this end, the optical device according to the invention comprises :

- a polymer film comprising a first surface and a second surface,
- a first electrode mapped on said first surface,
- a second electrode mapped on said second surface,
- 30           - a deformable optical element mapped on said first electrode or on said first surface.

            When a difference voltage is applied between the two electrodes, the Maxwell stress phenomenon makes the polymer film elongate in its plan, and this elongation is transmitted to the deformable optical element. The optical characteristics of the optical element change as a  
35           consequence because of its deformation.

            Since the optical element is directly in contact with the polymer film, the optical device is of small size.

            Since the elongation of the polymer film depends on the difference voltage applied between the electrodes, the deformation of the optical element is easily controllable.

In particular, said optical element is a circular lens or a diffraction grating.

The optical device can thus be used for varying the focus of a lens or the pitch of a diffraction grating.

5

In a preferred embodiment, the optical element is made of silicone rubber or made of Cyclic Olefin Copolymer.

Such materials present characteristics leading to a good compromise between optical quality and the ability to deform.

10

In a preferred embodiment, the polymer film is made of silicone rubber or acrylic dielectric elastomer.

Such materials allow a substantial deformation so that the optical characteristics of the optical element can be modified in a large proportion.

15

In a preferred embodiment, the first electrode and the second electrode have the shape of a circle.

In a preferred embodiment, the first electrode and the second electrode have the shape of a ring.

20

If electrodes are made of transparent material, a light beam can cross the polymer film and the optical element along its optical axis. This feature concerns the circular lens in particular.

Electrodes having the shape of rings allow to use either transparent or non-transparent material for the electrodes.

25

The invention also relates to a polymer film sandwiched between two electrodes for deforming an optical element.

The property of such material is advantageously used in view of electrically deforming an optical element.

30

The invention also relates to a method of changing the optical characteristics of an optical element, said method comprising the steps of :

- mapping a first electrode on a first surface of a polymer film,
- mapping a second electrode on a second surface of said polymer film,
- mapping said optical element on said first electrode or on said first surface,
- applying a voltage difference between said first electrode and said second electrode.

35

Such a method can be used for changing electrically the optical characteristic of an optical element.

Detailed explanations and other aspects of the invention will be given below.

## BRIEF DESCRIPTION OF THE DRAWINGS

5 The particular aspects of the invention will now be explained with reference to the embodiments described hereinafter and considered in connection with the accompanying drawings, in which identical parts or sub-steps are designated in the same manner :

Fig.1A depicts a first embodiment of an optical device according to the invention, in a first state,

10 Fig.1B depicts the first embodiment in a second state,

Fig.1C depicts the first embodiment in a three dimensional view, in transparency,

Fig.1D depicts a variant of the first embodiment, in a first state,

Fig.1E depicts the variant of the first embodiment in a second state,

15 Fig.1F depicts the variant of the first embodiment in a three dimensional view, in transparency,

Fig.2A depicts a second embodiment of an optical device according to the invention in a first state,

Fig.2B depicts the second embodiment in a second state,

Fig.2C depicts the second embodiment in a three dimensional view, in transparency,

20 Fig.2D depicts a variant of the second embodiment in a three dimensional view, in transparency.

## DETAILED DESCRIPTION OF THE INVENTION

25 The invention exploits the Maxwell stress phenomenon. This phenomenon relates to the deformation of a polymer material sandwiched between two electrodes. When a voltage difference is applied between said electrodes, the electrostatic forces resulting from the free charges squeeze and stretch the polymer.

30 Fig.1A depicts a first embodiment of an optical device according to the invention in a first state. This embodiment comprises :

- a polymer film 101 comprising a first surface 107 and a second surface 108. The polymer film 101 is advantageously made of silicone rubber or acrylic dielectric elastomer (for example the elastomers referred to as NuSil's CF19-2186 and VHB 4910 acrylic). The characteristics of dielectric polymers are such that they are soft (compliant), have a relatively high dielectric constant (approximately 3 or more), and have a high breakdown voltage (tens to hundred of kV/mm).
  - a first electrode 102 mapped on said first surface,
  - a second electrode 103 mapped on said second surface,
- 35

- a deformable optical element 104 mapped on said first electrode 102. The optical element corresponds to a circular lens advantageously made of silicone rubber or made of Cyclic Olefin Copolymer (COC). The lens may be fixed directly on the electrodes or by means of glue. The lens has a radius curvature of value  $r_1$ .

5

This optical device is advantageously symmetric around axis AA, which corresponds to the optical axis of the optical element 104.

10 The first electrode 102 is connected to a wire 105, and the second electrode 103 is connected to a wire 106. Wires 105 and 106 are intended to be connected to a voltage difference V.

Electrodes are made of compliant (soft) material so that they can deform with the polymer film. Electrodes can be deposited via spraying, screen printing or photo lithography. Electrodes can be made of graphite paste, very thin metal wires or very thin metal films.

15 The electrodes are advantageously made of transparent material so a light beam can either cross the lens, the polymer film and the electrodes. In that case, the electrodes are for example made of material known as "pdot" used in polymer LED display.

20 In a second state depicted in Fig.1B, a voltage difference V is applied between the electrodes via the wires 105-106. The polymer film 101 (and the electrodes 102-103) expands as a consequence in the radial direction  $d_1$  and  $d_2$ , in a plane parallel to the plan defined by the polymer film. As a consequence, the lens 104 also deforms, which makes its radius curvature  $r_2$  change.

25 The strain of the polymer film (generally in the order of several tens percents) has a quadratic relation with the voltage difference V. It must be in the order of a few kV, depending on the thickness of the polymer film. To reduce the voltage, a multi-layered structure could be advantageously made.

30 Fig.1C depicts the first embodiment as described in Fig.1A and Fig.1B in a three dimensional view, in transparency. The polymer film has preferably a circular shape so that its deformation is symmetric in the radial direction. Advantageously, the optical axis AA of the lens 104 is perpendicular to the plane defined by the polymer film 101.

35 Fig.1D depicts a variant of the first embodiment according to the invention, in a first state. It differs from Fig.1A, Fig.1B and Fig.1C in that the circular lens 104 is mapped on the first surface 107. Moreover, the partial area of the second surface 108 in front of the optical lens is not covered by said second electrode. The electrodes 102-103 form thus a ring centred around the optical axis AA of the lens 104. This variant allows to use transparent or non-transparent electrodes 102-103.

In a second state depicted in Fig.1E, a voltage difference V is applied between the electrodes via the wires 105-106. The polymer film 101 (and the electrodes 102-103) expand in

the radial direction  $d1$  and  $d2$ , in a plane parallel to the plan defined by the polymer film. As a consequence, the lens 104 also deforms, which makes its radius curvature  $r2$  change.

Fig.1F depicts the first embodiment as, described in Fig.1D and Fig.1E in a three dimensional view, in transparency.

5

Fig.2A depicts a second embodiment of an optical device according to the invention in a first state. This embodiment comprises :

- a polymer film 201 comprising a first surface 207 and a second surface 208. The polymer film 201 is advantageously made of silicone rubber or acrylic dielectric elastomer (for example the elastomers referred to as NuSil's CF19-2186 and VHB 4910 acrylic). The characteristics of dielectric polymers are such that they are soft (compliant), have a relatively high dielectric constant (approximately 3 or more), and have a high breakdown voltage (tens to hundred of kV/mm).
- a first electrode 202 mapped on said first surface,
- a second electrode 203 mapped on said second surface,
- a deformable optical element 204 mapped on said first electrode 202. The optical element corresponds to a diffraction grating having a base surface advantageously made of silicone rubber or made of Cyclic Olefin Copolymer (COC). The grating may be fixed directly on the electrodes or by means of glue. The diffraction grating has a pitch of value  $p1$ .

20

25

The first electrode 202 is connected to a wire 205, and the second electrode 203 is connected to a wire 206. Wires 205 and 206 are intended to be connected to a voltage difference  $V$ .

Electrodes are made of compliant (soft) material so that they can deform with the polymer film. Electrodes can be deposited via spraying, screen printing or photo lithography. Electrodes can be made of graphite paste, very thin metal wires or very thin metal films.

30

In a second state depicted in Fig.2B, a voltage difference  $V$  is applied between the electrodes via the wires 205-206. The polymer film 201 (and the electrodes 202-203) expand in the direction  $d1$  and  $d2$ , in a plane parallel to the plan defined by the polymer film. As a consequence, the diffraction grating 204 also deforms along its grating vector, which makes its pitch  $p2$  change.

35

The electrodes are advantageously made of transparent material so a light beam can either cross the grating, the polymer film and the electrodes. In that case, the electrodes are for example made of material known as "pdot" used in polymer LED display.

The strain of the polymer film (generally in the order of several tens percents) has a quadratic relation with the voltage difference  $V$ . It must be in the order of a few kV, depending

on the thickness of the polymer film. To reduce the voltage, a multi-layered structure could be advantageously made.

Fig.2C depicts the second embodiment as described in Fig.2A and Fig.2B in a three dimensional view, in transparency. The polymer film has preferably a rectangular shape having its sides parallel and perpendicular to the structure of the diffraction grating.

Fig.2D depicts in a three dimensional view (in transparency), a variant of the second embodiment according to the invention. It differs from Fig.2A, Fig.2B and Fig.2C in that the grating 204 is mapped on the first surface 207. Moreover, the partial area of the second surface 208 in front of the grating is not covered by said second electrode. The electrodes 202-203 form thus a rectangular or square surrounding. This variant allows to use transparent or non-transparent electrodes 202-203.

The deformation of the film polymer depends on the modulus of the material used, the shape of the material, as well as boundary conditions.

The invention is not limited to the shapes described for the polymer film. Indeed, other shapes could be defined for deform in a non-uniform way the optical element mapped on said polymer film.

The invention also relates to a polymer film sandwiched between two electrodes for deforming an optical element.

The invention also relates to a method of changing the optical characteristics of an optical element, said method comprising the steps of :

- mapping a first electrode on a first surface of a polymer film,
- mapping a second electrode on a second surface of said polymer film,
- mapping said optical element on said first electrode or on said first surface,
- applying a voltage difference between said first electrode and said second electrode.



**CLAIMS**

1. Optical device comprising :
  - a polymer film comprising a first surface and a second surface,
  - a first electrode mapped on said first surface,
  - 5 - a second electrode mapped on said second surface,
  - a deformable optical element mapped on said first electrode or on said first surface.
2. Optical device as claimed in claim 1 where said optical element is a circular lens or a diffraction grating.
- 10 3. Optical device as claimed in claim 1 or 2 where said optical element is made of silicone rubber or made of Cyclic Olefin Copolymer.
4. Optical device as claimed in claim 1, 2 or 3 where said polymer film is made of silicone rubber or acrylic dielectric elastomer.
- 15 5. Optical device as claimed in claim 1, 2, 3 or 4 where said first electrode and said second electrode have the shape of a circle.
- 20 6. Optical device as claimed in claim 1, 2, 3 or 4 where said first electrode and said second electrode have the shape of a ring.
7. Polymer film sandwiched between two electrodes for deforming an optical element.
- 25 8. Method of changing the optical characteristics of an optical element, said method comprising the steps of :
  - mapping a first electrode on a first surface of a polymer film,
  - mapping a second electrode on a second surface of said polymer film,
  - mapping said optical element on said first electrode or on said first surface,
  - 30 - applying a voltage difference between said first electrode and said second electrode.

**"Optical device comprising a polymer actuator"****ABSTRACT**

The invention relates to an optical device comprising :

- 5       - a polymer film (101) comprising a first surface(107) and a second surface (108),
- a first electrode (102) mapped on said first surface,
- a second electrode (103) mapped on said second surface,
- a deformable optical element (104) mapped on said first electrode or on said first
- 10       surface.

Use : Optical device

Ref : Fig.1C

1/4

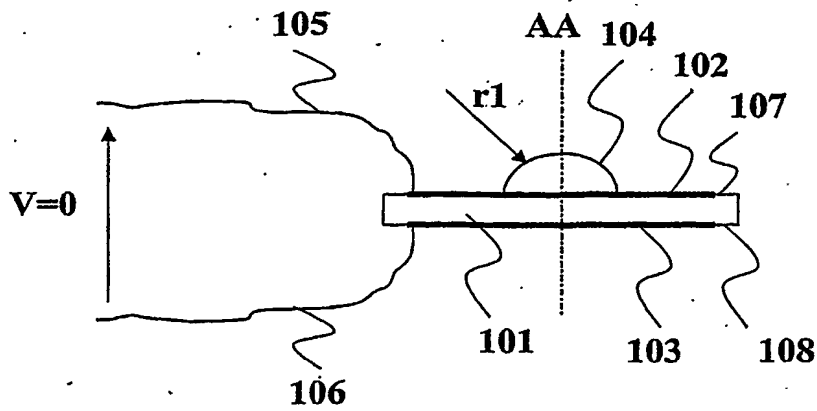


FIG. 1A

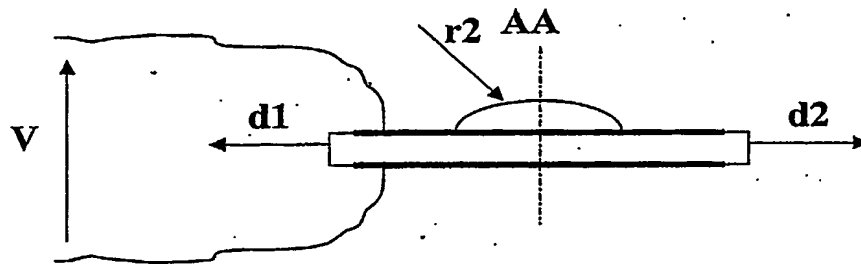


FIG. 1B

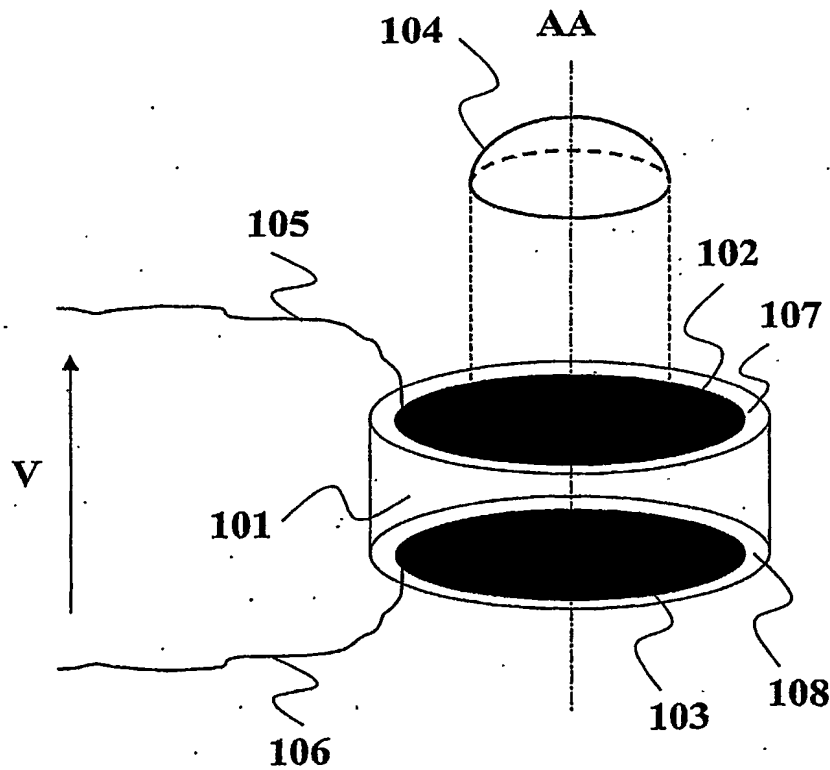


FIG. 1C

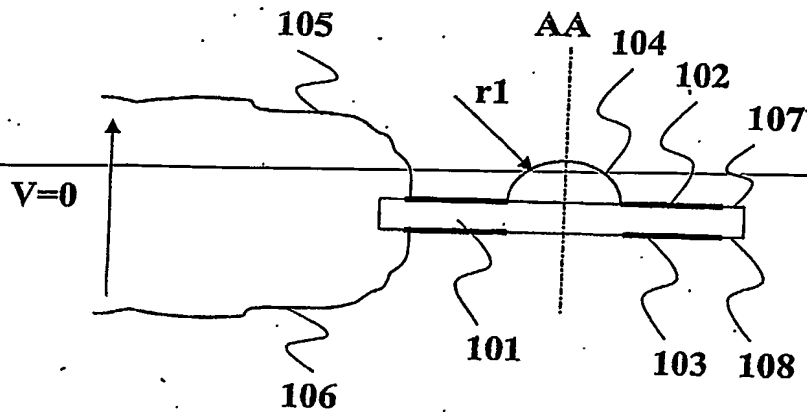


FIG. 1D

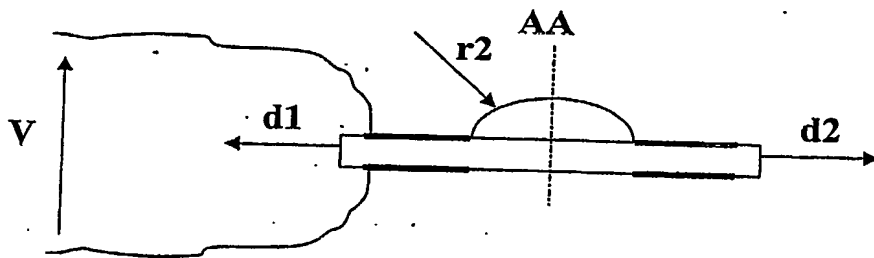


FIG. 1E

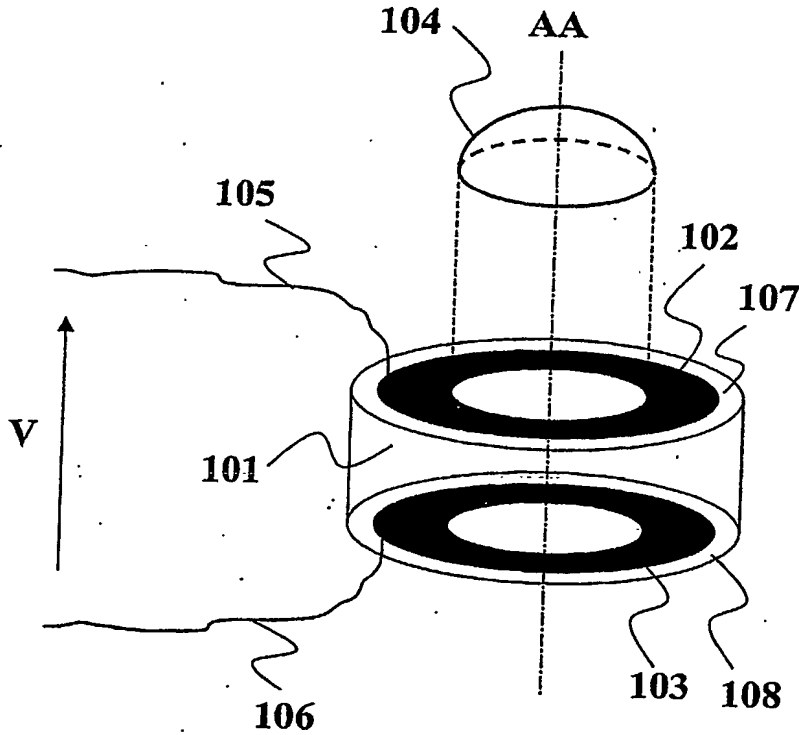


FIG. 1F

3/4

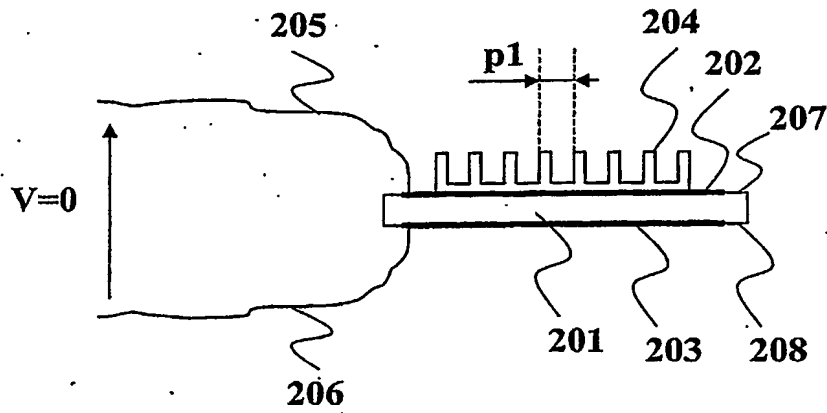


FIG. 2A

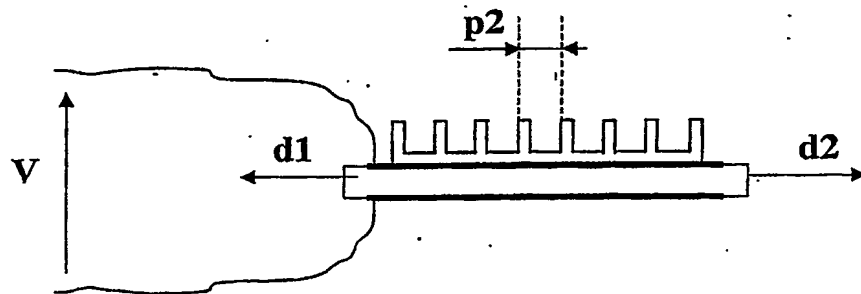


FIG. 2B

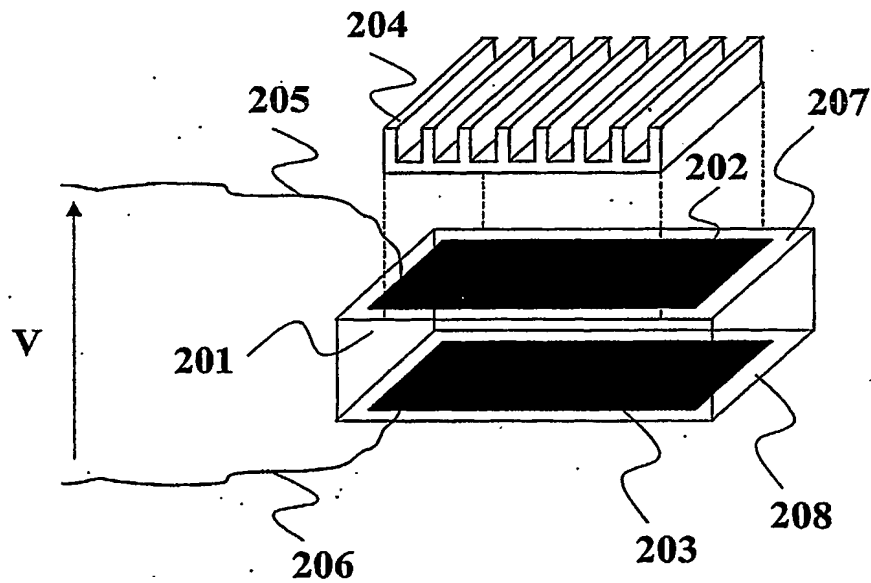
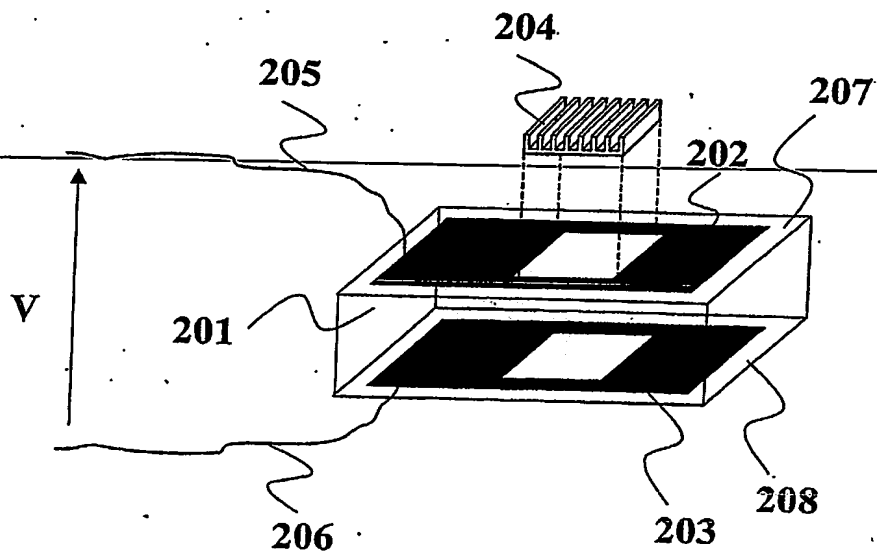


FIG. 2C

**FIG. 2D**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**